

SEALED BID

Do Not Return Via Email or Fax

Mailing Address:
P. O. Box 1948
Mobile, Alabama 36633
(251) 208-7434

CITY OF MOBILE

Purchasing Department
and Package Delivery:
Bid Delivery Address:

Government Plaza
4th Floor, Room S-408
205 Government St.
Mobile, Alabama 36644

Postal Service Does Not Deliver to This Street Address

BID SHEET

This is Not an Order

READ TERMS AND CONDITIONS
ON REVERSE SIDE OF THIS PAGE
BEFORE BIDDING

Typed by: GS

Buyer: 003

Please quote the lowest price at which you will furnish the articles listed below

DATE	BID NO.	DEPARTMENT	Commodities to be delivered F.O.B. Mobile to:
09/14/2026	6073	REGION'S ARENA	401 CIVIC CENTER DRIVE, MOBILE, AL 36602

This bid must be received and stamped by the Purchasing office not later than: 12:01PM, FRIDAY, SEPTEMBER 25, 2026

QUANTITY	ARTICLES	UNIT	UNIT PRICE		EXTENSION	
			Dollars	Cents	Dollars	Cents
	SPORTING EQUIPMENT					
	The City of Mobile is requesting bids on the following Sporting Equipment for Regions Arena. The arena is managed by Oak View Group. The equipment is standardized to match equipment utilized in other Oak View Group managed facilities. No substitutions will be accepted.					
QTY 3	ITEM 1: Spalding Renegade Portable Basketball Backstop to include 10'8" extension Model #0401050, Arena RENEGADE Superglass Model #0413100 (Official Backboard of NCAA Tournament), Lifetime Warranty Spalding Slam-Dunk Precision 180 SB Rim Goal (Official Rim of NCAA Tournament), 7 year warranty to include shot clock holders. Price _____ ***Additional Manufacturers specifications are attached (10 pages)***					
QTY 3	ITEM 2: Daktronics Shot Clock Holders, 1 Set Model 2160-2161 front and rear holders only - no wiring included. Price _____ each					
Page 1 of 3			TOTAL			

RETURN ONE SIGNED COPY OF THIS BID
IN ENCLOSED ENVELOPE

State delivery time within _____ days of receipt of P.O.

Phone Number _____

Firm Name _____

Email Address _____

Signature _____

Type or Print Name _____

1. All quotations must be signed with the firm name and by an authorized officer or employee.
2. Verify your bid before submission as it cannot be changed or corrected after being opened. In case of error in extension of prices, the unit price will govern.
3. If you do not bid, return this sheet and state reason. Otherwise, your name may be removed from our mailing list.
4. The right is reserved to reject any, or all quotations, or any portions thereof, and to waive technicalities if deemed to be in the interest of the City of Mobile.
5. This bid shall not be reassignable except by written approval of the Purchasing Agent of the City of Mobile.
6. State brand and model number of each item. All items bid must be new and latest model unless otherwise specified.
7. If bid results are desired, enclose a self-addressed and stamped envelope with your bid. (All or None bids only)
8. Do not include Federal Excise Tax as an exemption certificate will be issued in lieu of same. The City is exempt from the State of Alabama and City sales taxes.
9. PRICES ARE TO BE FIRM AND F.O.B. DESTINATION UNLESS OTHERWISE REQUESTED.
10. BID WILL BE AWARDED ON ALL OR NONE BASIS UNLESS OTHERWISE STATED.
11. Bids received after specified time will be returned un-opened.
12. Failure to observe stated instructions and conditions will constitute grounds for rejection of your bid.
13. Furnish literature, specifications, drawings, photographs, etc., as applicable with the items bid.
14. Vendor may be required to obtain City of Mobile Business License as applicable to City of Mobile Municipal Code Section 34-50. For Business License inquiry, contact the Revenue Department at (251) 208-7462 or cityofmobile.org/business-license-overview/
15. IF a bid bond is required in the published specifications, see below:
Each bid shall be accompanied by a **Cashier's Check, Certified Check, Bank Draft or Bid Bond** for the sum of five (5) Percent of the amount bid, made payable to the City of Mobile and certified by a reputable banking institution. All checks shall be returned promptly, except the check of the successful bidder, which shall be returned after fulfilling the bid.
16. Contracts in excess of \$50,000 require that the successful bidder make every possible effort to have at least fifteen (15) percent of the total value of the contract performed by socially and economically disadvantaged individuals.
17. All bids/bid envelopes must have the bid number noted on the front. Bids that arrive unmarked and are opened in error shall be returned to vendor as an unacceptable bid.
18. If successful vendor's principal place of business is out-of-state, vendor may be required to have a Certificate of Authority to do business in the State of Alabama from the Alabama Secretary of State prior to issuance of a Purchase Order. Vendors are solely responsible for consulting with the Secretary of State to determine whether a Certificate is required. See www.sos.alabama.gov/BusinessServices/ForeignCorps.aspx. Please note that the time between application for and issuance of a Certificate of Authority may be several weeks.
19. Vendors do not need a City of Mobile Business License or Certificate of Authority from the Alabama Secretary of State to submit a bid, but may need to obtain the Business License and Certificate of Authority if applicable, prior to issuance of a Purchase Order.
20. Bids and addendums are posted at www.cityofmobile.org/services/business/bids/. It is the responsibility of the vendor to check the City's bid page for updates and addendums.
21. Vendors must be able to provide the following upon request. Federal W-9 form, proof of registration in the E-Verify program, and Certificate of Authority to do business in Alabama/Registration with the Alabama Secretary of State within 24 hours of request.
22. City of Mobile applies local vendor preference to all purchases: Code of Alabama, 1975, Sections 41-16-50(a) and 41-16-50(d), except federally funded grants.
23. Equal Employment Opportunity. Except as otherwise provided under 41 CFR part 60, all contracts that meet the definition of "federally assisted construction contract" in 41 CFR Part 60-1.3 must include the equal opportunity clause provided under 41 CFR 60-1.4(b), in accordance with Executive Order 11246, "Equal Employment Opportunity" (30 FR 12319, 12935, 3 CFR Part, 1964-1965 Comp., p. 339), as amended by Executive Order 11375, "Amending Executive Order 11246 Relating to Equal Employment Opportunity," and implementing regulations at 41 CFR part 60, "Office of Federal Contract Compliance Programs, Equal Employment Opportunity, Department of Labor."
24. Davis-Bacon Act, as amended (40 U.S.C. 3141-3148) will apply when required by Federal program regulations.

Page_____ of _____

By _____

BID CONTINUATION SHEET

Page _____ of _____

QUANTITY	ARTICLES	UNIT	UNIT PRICE		EXTENSION	
			Dollars	Cents	Dollars	Cents
	Page 3 of 3 All vendors will be required to provide verification of enrollment in the E-Verify program. Additional information may be found at http://immigration.alabama.gov/ If the successful vendor's principal place of business is out-of-state, vendor may be required to have a Certificate of Authority to do business in the State of Alabama from the Secretary of State prior to issuance of a Purchase Order. Vendors are solely responsible for consulting with the Secretary of State to determine whether a Certificate is required. See: www.sos.alabama.gov/BusinessServices/ForeignCorps.aspx. Please note that the time between application for the issuance of a Certificate of Authority may be several weeks. Upon notification, vendor will have 10 business days to provide the Certificate of Authority and the E-Verify numbers to the Purchasing Department before award can be completed. (Vendors will possibly need to pay the expedite fee to meet this requirement because application is not sufficient. We must have a copy of the certificate with your Company ID number). Vendors do not need a City of Mobile Business License or Certificate of Authority from the Alabama Secretary of State, nor the E-Verify for certification to submit a bid, but will need to obtain the Business License and Certificate of Authority verification and/or provide the E-Verify Certification, if applicable, prior to issuance of a Purchase Order. State of Alabama Local Vendor Preference Law 41-16-50 (a) and (d) will apply to this purchase. If you have any questions, please feel free to contact the Purchasing Department at purchasing@cityofmobile.gov. If you have any questions, please feel free to contact the Purchasing Department at purchasing@cityofmobile.gov. CONE OF SILENCE. From the time of advertising, and until the final award by completion of a signed contract or purchase document issued by the City, there is a prohibition on communication by respondents (or anyone on their behalf) with the City staff and elected officials regarding this request for bids, proposals, or qualifications. This does not apply to communications directly with the Procurement Department staff during authorized question periods, or with designated City staff during pre-bid conferences, interviews, requests for clarification, and written contract negotiations. Breaking the established prohibition on communication, if proven, may result in a disqualification of your submittal. TO BE AWARDED ALL OR NONE.					
			TOTAL			

**RETURN ONE SIGNED COPY OF THIS QUOTATION
IN ENCLOSED ENVELOPE**

READ ABOVE INSTRUCTIONS BEFORE QUOTING

Firm Name _____

By _____

SPALDING SPECIFICATIONS

DATE: 8/2/16

MODEL NUMBER: 0401050

DESCRIPTION: Spalding Spring Portable 10'8" Extension

SPECIFICATIONS:

Frame:

The base of the frame shall consist of structural steel tubing, comprising of 3"x5", 2"x5", round tubing, and formed heavy gauge steel parts welded together to form a box section. The base weldment supports 2 structural steel arms consisting of 3"x5", 3"x3", 2-1/8" Dom, and steel parts welded together. Hinges consist of 1-1/2" ground and polished pins with bronze bushings on all pivot points. The unit shall have a boom weldment consisting of structural steel tubing, comprising of 5"x5", formed sheet metal, and steel parts welded together. The boom shall have an extension of 10'8" from the front base pad to the front of the backboard glass. The unit will come preassembled with 2000lbs. of ballast weight. The total weight of assembled unit when in the playing position is approximately 3700lbs.

Wheels:

The front shall be provided with 2 heavy-duty swivel casters each with one 6"x2" poly wheel rated at 900lbs. The rear of the base shall have double 6"x2" poly wheels each side rated at 1800lbs. Each unit shall come with an automatic lifting mechanism attached to the front casters for ease of set-up.

Anchors:

Each unit shall come equipped with ribbed brass floor inserts and two heavy-duty drop pins for locating the baskets, Rear anchor and brass cover plate, and adjustable chain links to anchor the unit to the floor.

Folding:

The unit shall operate with 7 Chrome Silicon springs to assist in raising and lowering. A spring cover shall be included and shall be covered to match the padding.

Padding:

All front padding shall be a minimum of 4" thick P1895 covered with 24oz. Naugahyde®. All base side padding shall be a minimum of 2" thick P1895 covered with 24oz. Naugahyde®. Padding is available in 30+ colors at no additional charge and is removable.

Finish:

The unit shall be finished with a baked on electro-static powder-coat standard color white. Custom colors are available at an additional charge.

Rim and Backboard attachment:

Super Glass Pro Backboard. The rim and backboard shall be attached to the unit as a direct mount which completely eliminate stress on the glass backboard during play. The rim will mount through spacers and bolt directly to the backboard structure and to the front of the portable to insure that there is no contact between the mounting bolts, rim, and the glass backboard. A V-Brace support is supplied to further support the backboard during play.



Backboard: 0413100 glass backboard with border and target measures 42" x 72". Limited Lifetime warranty.



Goal: SD180sb with 180-degree breakaway action. Seven year warranty on breakaway mechanism and ring.

WARRANTY: Ten year limited warranty on frame, two year on telescopic brace, and two years on the foot pedestals

SHIPPING WEIGHT: 3800 lbs approximate

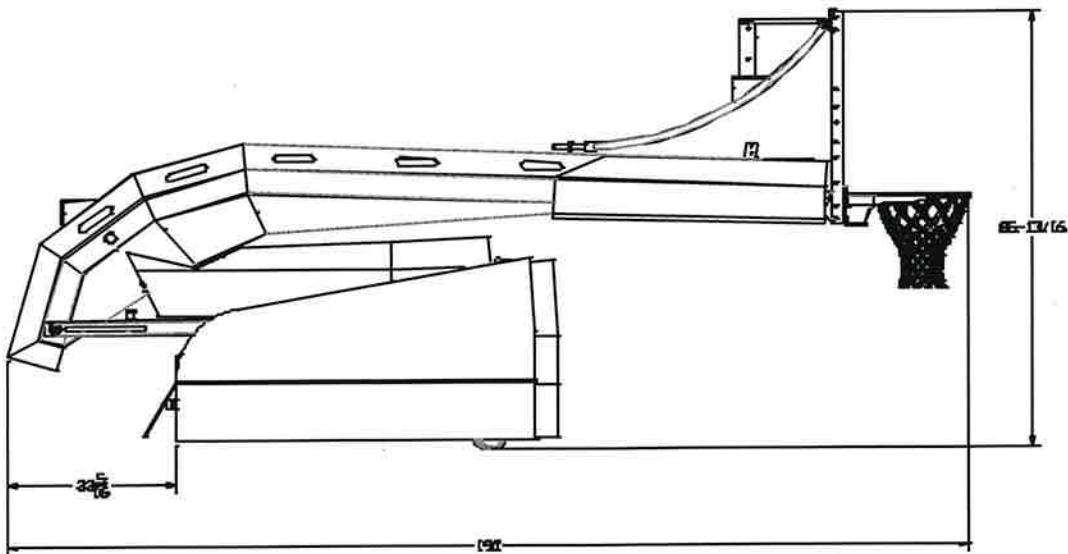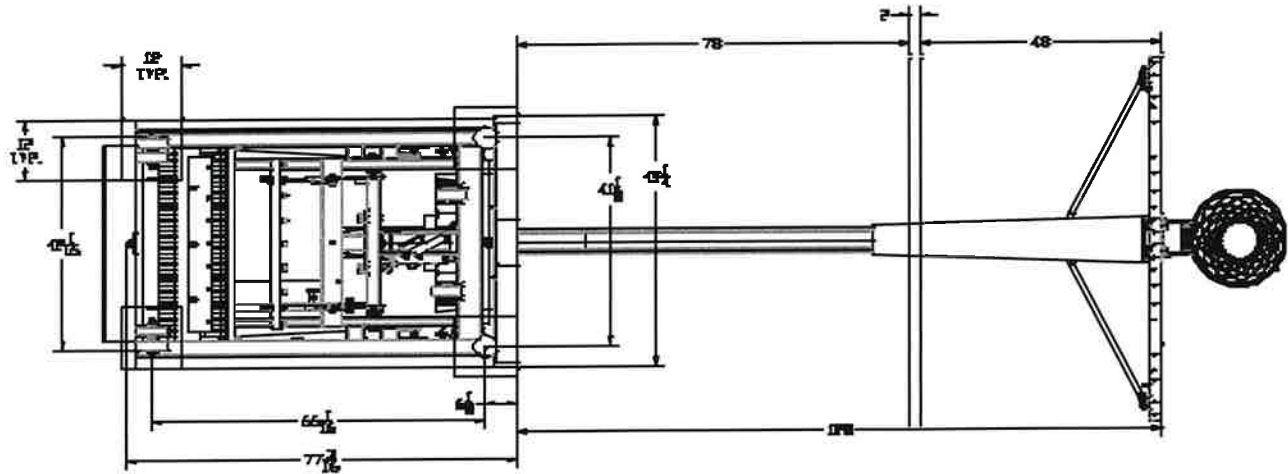

DAKTRONICS BB-2161 PRODUCT SPECIFICATIONS



By default, LED light strips illuminate when the shot clock horn sounds



Side Profile

This indoor two-sided transparent LED basketball game clock and shot clock timer displays game time to 99:59 and shot times up to a value of 99 seconds. It can also count down from any preset time between 0 and 99 seconds. For any time under 10 seconds, shot time can be displayed to 1/10 of a second. During the last minute of the period, game time is displayed to 1/10 of a second. By default, LED light strips around the perimeter of both sides of the display illuminate red for a couple seconds when the shot clock horn sounds at 0.0 and then turn off. Light strips may instead be set to light up when the game horn sounds, the game clock equals zero, or the game clock is stopped. A hand-held start/stop/reset switch is included with purchase. The BB-2161 is typically used as an auxiliary backstop display with the BB-2160 (see [DD4975293](#)).

COMPONENT	DIMENSIONS	UNCRATED WEIGHT	POWER (120 VAC)
SHOT CLOCK	1'-10" H x 1'-10.75" W x 3" D* (559 mm x 578 mm x 76 mm)	40 lb (18.1 kg)	228 Watts, 1.9 Amps Note: Models with 240 VAC power at half the indicated amperage are also offered.
CONTROL ENCLOSURE	1'-2.25" H x 1'-2" W x 3.75" D (362 mm x 356 mm x 95 mm)	25 lb (11 kg)	
HORN ENCLOSURE	5.5" H x 5.5" W x 3.5" D (140 mm x 140 mm x 89 mm)	5 lb (2.3 kg)	

*Depth shown is for display only. Depth of bottom mounting surface is 8" (203 mm).

DIGITS

- Shot clock digits are 7" (178 mm) high. Game clock digits are 5" (127 mm) high. Tenth of a second shot clock digits are 3.5" (89 mm) high.
- Shot clock digits and light strips are red. Game clock digits are amber.

DISPLAY COLOR

Semi-gloss Black

CONSTRUCTION

Durable, lightweight aluminum with polycarbonate faces

PRODUCT SAFETY APPROVAL

UL-listed and tested to CSA standards **for indoor use only**

OPERATING TEMPERATURES

- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
DD4975294 092925 Page 1 of 4



DAKTRONICS BB-2161 PRODUCT SPECIFICATIONS

CONTROL CONSOLE	CONTROL OPTIONS
All Sport® 5000* (see SL-03991)	Wireless: 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370). This is a popular upgrade. Wired: One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console.

* Controller not included with standard purchase; timer(s) are typically controlled by the same console controlling the basketball scoreboard(s).

HORN

A separate, remotely-mounted vibrating horn sounds automatically when the period clock counts down to zero or manually as controlled by the operator.

CONTROL ENCLOSURE

Control enclosure will be separately mounted no more than 30' (9.1 m) from the shot clock. Verify the structure measurements of 14" x 14" x 4" (356 mm x 356 mm x 102 mm).


GENERAL INFORMATION

Timer provides game and shot clock timing capabilities. 100% solid state electronics are housed in an aluminum cabinet. Mounting hardware not included. Specifications and pricing are subject to change without notice.


FOR ADDITIONAL INFORMATION

- Mechanical Specifications: DWG-5560821 (attached)
- Electrical Specifications: DWG-4930974 (attached)
- Architectural Specifications: See [DD4975279](#)
- Manual: See [DD4932144](#)

BB-2161

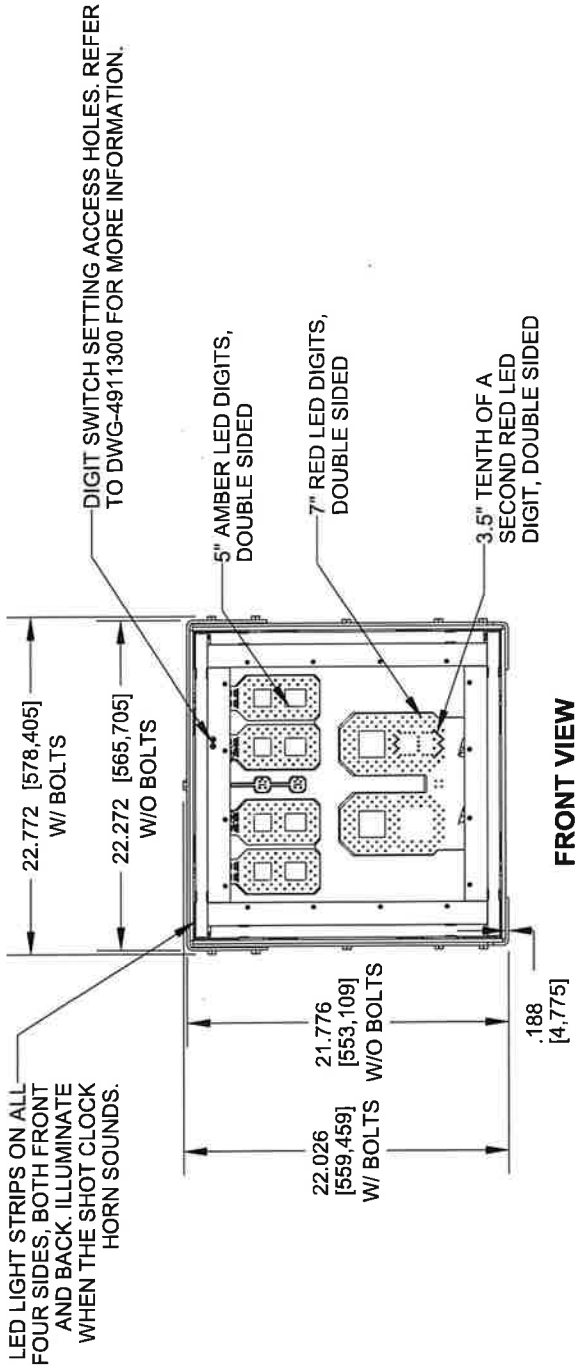

SIDE VIEW

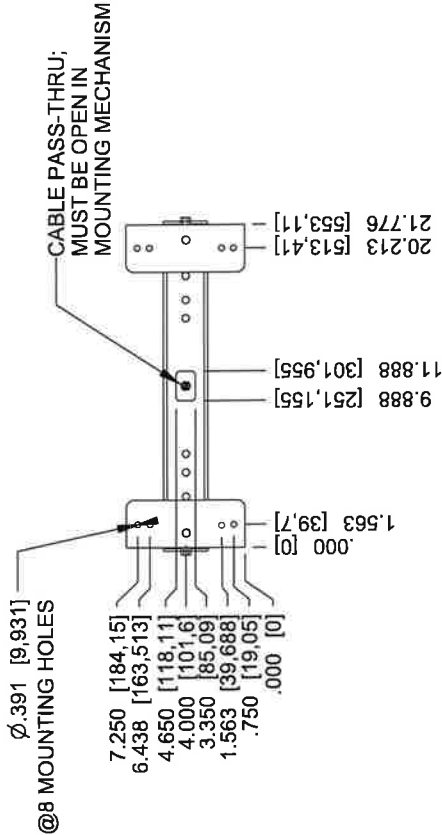

BOTTOM VIEW
MOUNTING DIMENSIONS

WEIGHTS	
SHIPPING WEIGHT	MOUNTING WEIGHT
65 LBS (29 KG)	40 LBS (18 KGS)

REV:	DATE:	DESCRIPTION:	BY:
THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2021 DAKTRONICS, INC. (USA)			
THIRD ANGLE PROJECTION			
PROJECT: TRANSPARENT SHOT CLOCKS			
TITLE: MECHANICAL SPEC; TRANSPARENT; BB-2161			
DATE: 11-SEP-25	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/15	DO NOT SCALE DRAWING	00	00
DESIGN: HPSZANK	JOB NO. P2345	FUNC - TYPE - SIZE E - 10 - A	5560821
DRAWN: HPSZANK			

REMOVE SCREWS @ 6 TO
ACCESS CONTROL ENCLOSURE.

MAIN SHOT CLOCK
POWER AND SIGNAL JACK
19 VDC, 3.6 AMPS


J34 - SHOT = 0 LED LIGHT STRIP
19 VDC, 1.6 AMPS

J31 - SIGNAL INPUT


J41 - POWER INPUT

J33 - HORN OUTPUT

J32 - BACKBOARD LED LIGHT STRIPS
19 VDC, 1.6 AMPS



TOP VIEW

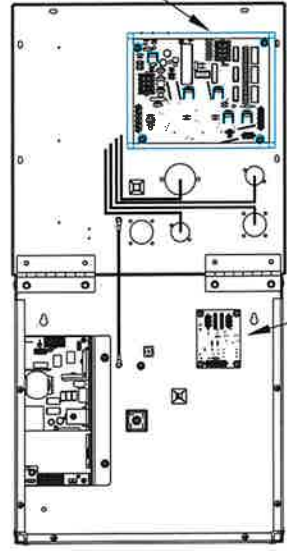

TOP VIEW
COVER OPEN

ADDRESS INFORMATION	
DRIVER:	A1
ADDRESS:	1

OA-2345-0021	
SPECIFICATION	LABEL DATA
120V AC PRIMARY	
1.9 AMP, 228W	
60 Hz	

OA-2345-0022	
SPECIFICATION	LABEL DATA
240V AC PRIMARY	
.95 AMP, 228W	
60 Hz	

NOTES:

1. USE MINIMUM OF 22AWG, SHIELDED, TWO CONDUCTOR CABLE FOR SIGNAL TERMINATION.
2. DO NOT WORK ON ENERGIZED CONTROL ENCLOSURE UNLESS YOU ARE A CERTIFIED ELECTRICIAN OR DIRECTED BY DAKTRONICS.




THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2021 DAKTRONICS, INC. (USA)

PROJECT: TRANSPARENT SHOT CLOCK

TITLE:	ELECTRICAL SPEC: SHOT CLOCK CONTROL ENCL.
DATE:	20 AUG 21
SCALE:	1=10
DESIGN:	TSPRACK
DRAWN:	TSPRACK


DIM UNITS:	INCHES [MILLIMETERS]
DO NOT SCALE DRAWING	
JOB NO.	P2345
FUNC. TYPE - SIZE	E - 10 - A

4930974



THIRD ANGLE PROJECTION

DAKTRONICS BB-2160 PRODUCT SPECIFICATIONS



By default, LED light strips illuminate when the shot clock horn sounds



Side Profile

This indoor two-sided transparent LED basketball game clock and shot clock timer displays game time to 99:59 and shot times up to a value of 99 seconds. It can also count down from any preset time between 0 and 99 seconds. For any time under 10 seconds, shot time can be displayed to 1/10 of a second. During the last minute of the period, game time is displayed to 1/10 of a second. By default, LED light strips around the perimeter of both sides of the display illuminate red for a couple seconds when the shot clock horn sounds at 0.0 and then turn off. Light strips may instead be set to light up when the game horn sounds, the game clock equals zero, or the game clock is stopped. A hand-held start/stop/reset switch is included with purchase.

COMPONENT	DIMENSIONS	UNCRATED WEIGHT	POWER (120 VAC)
SHOT CLOCK	2'-6" H x 2'-6.5" W x 3" D* (762 mm x 775 mm x 76 mm)	61 lb (27.7 kg)	228 Watts, 1.9 Amps Note: Models with 240 VAC power at half the indicated amperage are also offered.
W/ OPTIONAL CAMERA MOUNT	2'-9" H x 2'-8" W x 3" D* (838 mm x 813 mm x 76 mm)	67 lb (30.4 kg)	
CONTROL ENCLOSURE	1'-2.25" H x 1'-2" W x 3.75" D (362 mm x 356 mm x 95 mm)	25 lb (11.3 kg)	
HORN ENCLOSURE	5.5" H x 5.5" W x 3.5" D (140 mm x 140 mm x 89 mm)	5 lb (2.3 kg)	

*Depth shown is for display only. Depth of bottom mounting surface is 8" (203 mm).

DIGITS

- Shot clock digits are 13" (330 mm) high. Game clock and tenth of a second shot clock digits are 7" (178 mm) high.
- Shot clock digits and light strips are red. Game clock digits are amber.

DISPLAY COLOR

Semi-gloss Black

CONSTRUCTION

Durable, lightweight aluminum with polycarbonate faces

PRODUCT SAFETY APPROVAL

UL-listed and tested to CSA standards **for indoor use only**

OPERATING TEMPERATURES

- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
DD4975293 092225 Page 1 of 4



DAKTRONICS BB-2160 PRODUCT SPECIFICATIONS

CONTROL CONSOLE	CONTROL OPTIONS
All Sport® 5000* (see SL-03991)	Wireless: 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370). This is a popular upgrade. Wired: One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console.

* Controller not included with standard purchase; timer(s) are typically controlled by the same console controlling the basketball scoreboard(s).

HORN

A separate, remotely-mounted vibrating horn sounds automatically when the period clock counts down to zero or manually as controlled by the operator.

CONTROL ENCLOSURE

Control enclosure will be separately mounted no more than 30' (9.1 m) from the shot clock. Verify the structure measurements of 14" x 14" x 4" (356 mm x 356 mm x 102 mm).

GENERAL INFORMATION

Timer provides game and shot clock timing capabilities. 100% solid state electronics are housed in an aluminum cabinet. Mounting hardware not included. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES

- Camera mount
- BB-2161 Auxiliary Shot Clock (see [DD4975294](#))
- LTS-BB Backboard Light Strips (see [DD4703928](#))

FOR ADDITIONAL INFORMATION

- Mechanical Specifications: DWG-5560820 (attached)
- Electrical Specifications: DWG-4930974 (attached)
- Architectural Specifications: See [DD4975276](#)
- Manual: See [DD4932144](#)


BB-2160

OPTIONAL CAMERA MOUNTS WILL ONLY ACCEPT A Ø2.00" PIPE. ONLY USE ONE MOUNT AT A TIME. THE CAMERA CAN WEIGH UP TO 40LBS. THE MAX TOTAL WEIGHT OF THE CAMERA AND THE MOUNTING HARDWARE MUST NOT EXCEED 50 LBS.


DIGIT SWITCH SETTING ACCESS HOLES. REFER TO DWG-4911300 FOR MORE INFORMATION.

CABLE TRAY PROVIDED WITH CAMERA MOUNTS. CAN ATTACH TO EITHER SIDE OF THE SHOT CLOCK.

LED LIGHT STRIPS ON ALL FOUR SIDES, BOTH FRONT AND BACK ILLUMINATE WHEN THE SHOT CLOCK HORN SOUNDS.

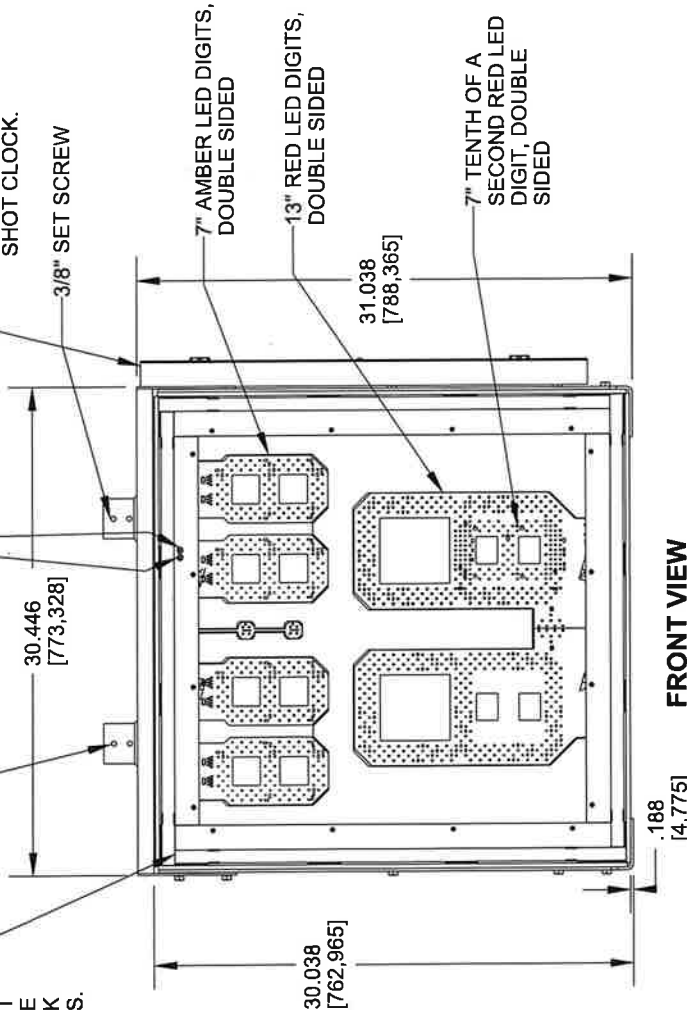


CABLE PASS-THRU; MUST BE OPEN IN MOUNTING MECHANISM

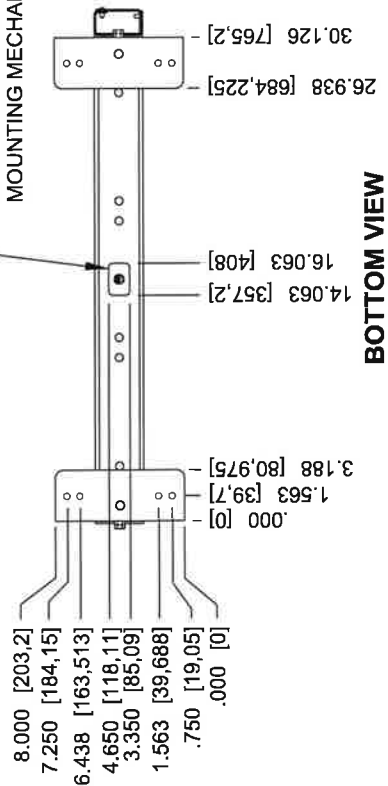


SIDE VIEW

WEIGHTS	
SHIPPING WEIGHT	MOUNTING WEIGHT
92 LBS (42 KG)	67 LBS (30 KGS)

REV:	DATE:	DESCRIPTION:	BY:
THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2021 DAKTRONICS, INC. (USA)			
PROJECT: TRANSPARENT SHOT CLOCKS			
TITLE: MECHANICAL SPEC; TRANSPARENT: BB-2160			
DATE: 11-SEP-25	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/15	DO NOT SCALE DRAWING	00	00
DESIGN: HPSZANK	JOB NO.	FUNC - TYPE - SIZE	
DRAWN: HPSZANK	P2345	E - 10 - A	5560820

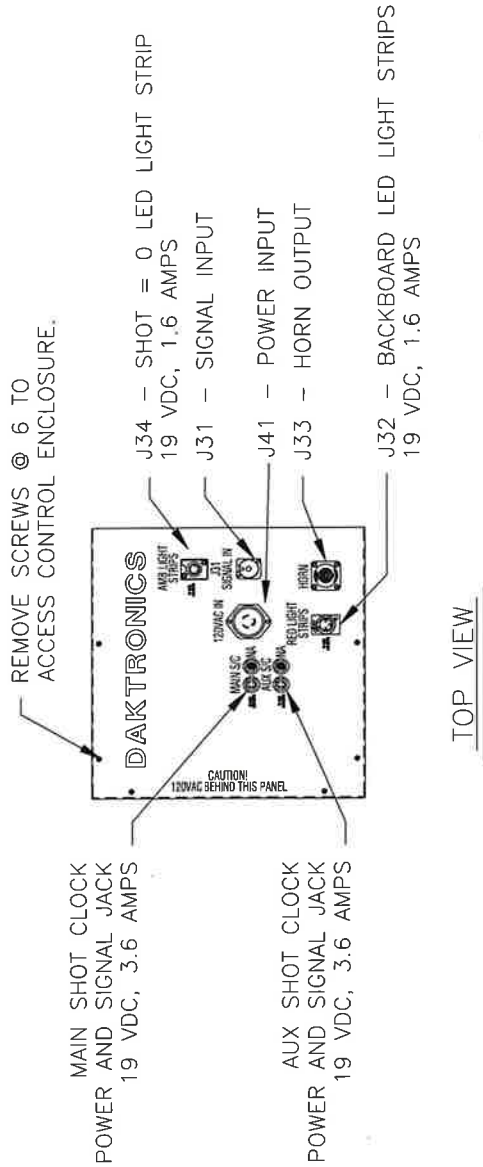

TOP VIEW

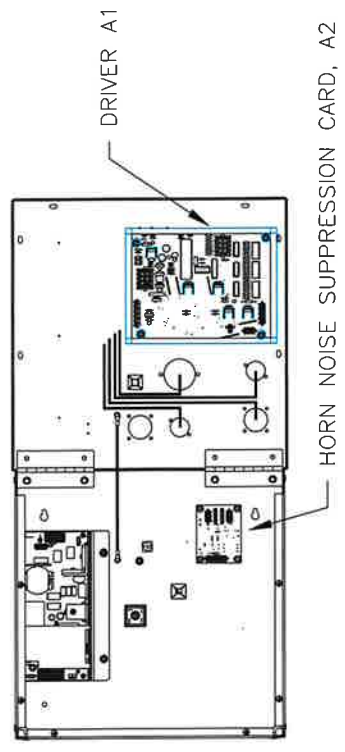

TOP VIEW
COVER OPEN

ADDRESS INFORMATION	
DRIVER:	A1
ADDRESS:	1

OA-2345-0021	
SPECIFICATION LABEL DATA	
120V AC PRIMARY	
1.9 AMP, 228W	
60 Hz	

OA-2345-0022	
SPECIFICATION LABEL DATA	
240V AC PRIMARY	
.95 AMP, 228W	
60 Hz	

NOTES:

1. USE MINIMUM OF 22AWG, SHIELDED, TWO CONDUCTOR CABLE FOR SIGNAL TERMINATION.
2. DO NOT WORK ON ENERGIZED CONTROL ENCLOSURE UNLESS YOU ARE A CERTIFIED ELECTRICIAN OR DIRECTED BY DAKTRONICS.

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2021 DAKTRONICS, INC. (USA)

THIRD ANGLE PROJECTION

PROJECT: TRANSPARENT SHOT CLOCK

TITLE: ELECTRICAL SPEC: SHOT CLOCK CONTROL ENCL.	SHEET: 00	REV: 00
DATE: 20 AUG 21	DIM UNITS: INCHES [MILLIMETERS]	DO NOT SCALE DRAWING
SCALE: 1=10	JOB NO. P2345	FUNG - TYPE - SIZE E - 10 - A
DESIGN: TSPRACK	DRAWN: TSPRACK	4930974



PROCUREMENT DEPARTMENT

Potential bidders are responsible to check this site for any **ADDENDUMS** that are issued. It is the responsibility of the **BIDDER** to check for, download, and include with their **BID RESPONSE** any and all **ADDENDUMS** that are issued for a specific **BID** published by the City of Mobile. Failure to download and include **ADDENDUMS** in your **BID RESPONSE** may cause your bid to be rejected.

This is a sealed bid. Any responses faxed or emailed will be rejected.

This is a sealed bid. Any response must be submitted in a sealed envelope with the bid number and bid opening date on the outside of the envelope.

Any response that arrives improperly marked or with no bid number and opening date on the outside of the delivery or express package and opened in error will be rejected and not considered.

It is the responsibility of the bidder to ensure that their bid response is delivered to and received in the Purchasing Department before the date and time of the bid opening.

Please read the Terms and Conditions.

All bids are F.O.B. destination unless otherwise stated.

Please sign your bid.

Package/Bid Delivery Address (Request First Delivery):
Purchasing Department
205 Government St., RM S408
Mobile, AL 36644